

## CONSTRUCT SYSTEM



### FEATURES

The Construct line offers flexible lighting solutions across all specifications to meet various demands. With surface, pendant, and recessed mounting options, this lighting system allows for specific customization, from residential applications like kitchens, foyers, and offices to commercial applications like art galleries, retail stores, and reception areas. An effortless approach, this perfect solution maximizes lighting creativity.

NUMBER	35757-01
WATTS	11W INTEGRATED LED
BEAM ANGLE	25°
KELVIN	3000K
DELIVERED LUMENS	750LM
CRI	90+
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	5.67"L x 1.30"W x 2.16"H


**SHOWN:** Multiple Spot (36379) module in a Pendant Profile

### CERTIFICATIONS



### MOUNT CHOICES


#### SURFACE MOUNT AND PENDANT

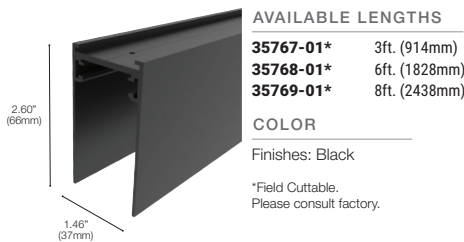


#### TRIM RECESSED




#### TRIMLESS RECESSED

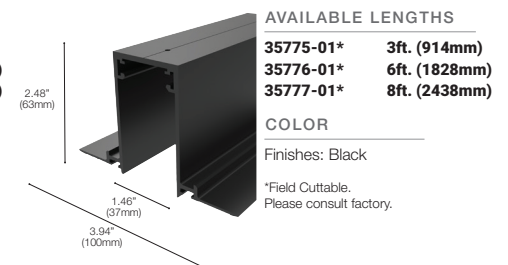


Surface Mount




Pendant Mount



Trim Recessed




Trimless Recessed




## MODULES CONT'D


### 33W MULTIPLE LIGHT

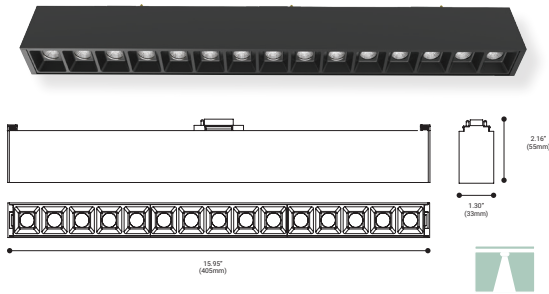

### 22W MULTIPLE LIGHT

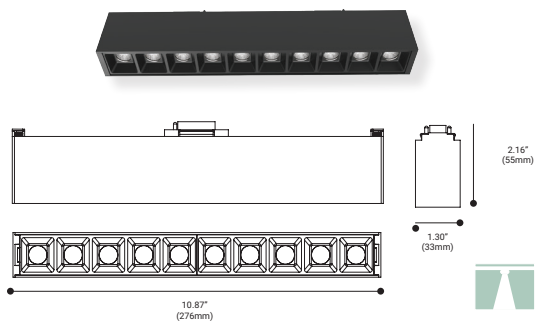

### 11W MULTIPLE LIGHT

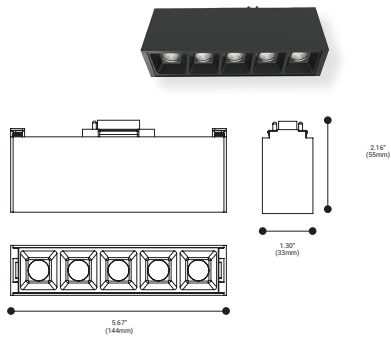

## MODULE SPECIFICATIONS


NUMBER	35759-01
WATTS	33W INTEGRATED LED
BEAM ANGLE	25°
KELVIN	3000K
DELIVERED LUMENS	2300LM
CRI	90+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	15.95"L x 1.30"W x 2.16"H

NUMBER	35758-01
WATTS	22W INTEGRATED LED
BEAM ANGLE	25°
KELVIN	3000K
DELIVERED LUMENS	1520LM
CRI	90+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	10.87"L x 1.30"W x 2.16"H

NUMBER	35757-01
WATTS	11W INTEGRATED LED
BEAM ANGLE	25°
KELVIN	3000K
DELIVERED LUMENS	750LM
CRI	90+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	5.67"L x 1.30"W x 2.16"H

## MODULES CONT'D


### 27.5 LENS

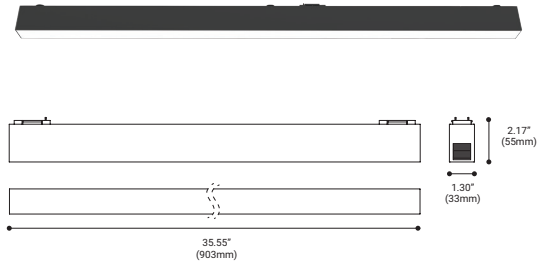

## MODULE SPECIFICATIONS


NUMBER	36374-01
WATTS	27.5W INTEGRATED LED
BEAM ANGLE	115°
KELVIN	3000K
DELIVERED LUMENS	1610LM
CRI	80+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	35.55"L x 1.30"W x 2.17"H

### 19W LENS

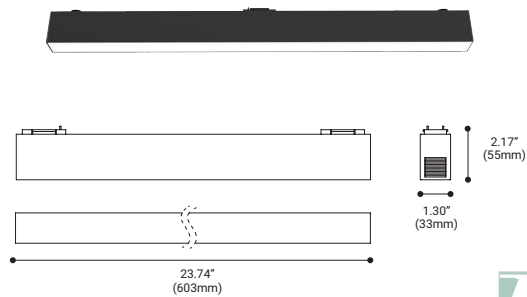

NUMBER	36373-01
WATTS	19W INTEGRATED LED
BEAM ANGLE	115°
KELVIN	3000K
DELIVERED LUMENS	1110LM
CRI	80+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	23.74"L x 1.30"W x 2.17"H


### 10W LENS

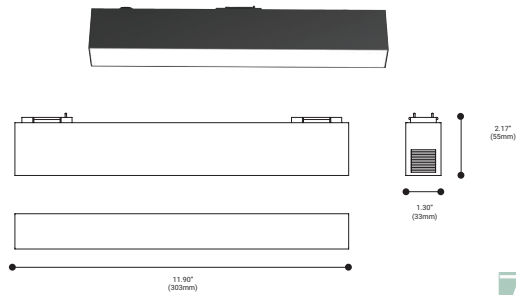

NUMBER	36372-01
WATTS	10W INTEGRATED LED
BEAM ANGLE	115°
KELVIN	3000K
DELIVERED LUMENS	570LM
CRI	80+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	11.90"L x 1.30"W x 2.17"H

## MODULES CONT'D


### 4.5W DUAL LENS

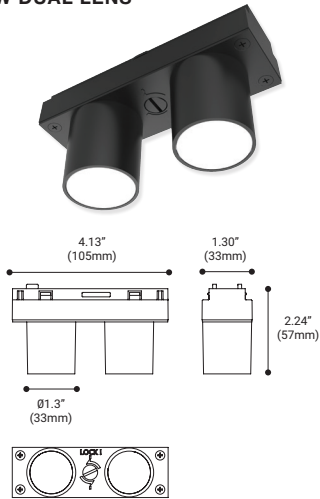

## MODULE SPECIFICATIONS


NUMBER	35765-01
WATTS	4.5W INTEGRATED LED
BEAM ANGLE	80°
KELVIN	3000K
DELIVERED LUMENS	200LM
CRI	90+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	4.13"L x 1.30"W x 2.13"H

### 4.5W DUAL BAFFLE

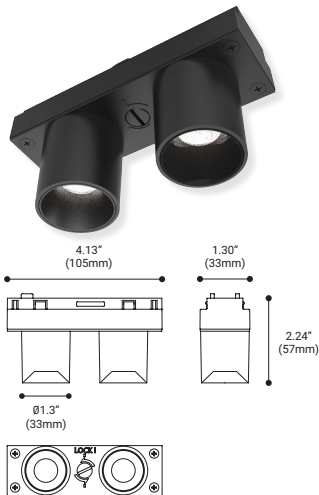

NUMBER	36377-01
WATTS	4.5W INTEGRATED LED
BEAM ANGLE	35°
KELVIN	3000K
DELIVERED LUMENS	330LM
CRI	90+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	4.13"L x 1.30"W x 2.13"H


### 11W MULTIPLE SPOT

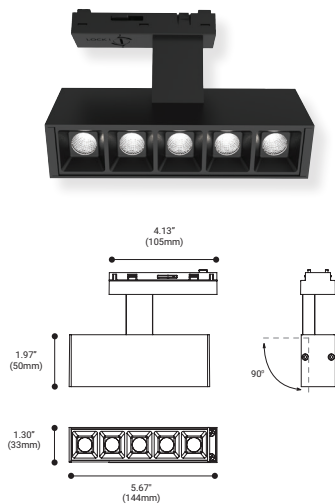

NUMBER	36379-01
WATTS	11W INTEGRATED LED
BEAM ANGLE	30°
KELVIN	3000K
DELIVERED LUMENS	790LM
CRI	90+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	5.67" Dia x 1.30"W x 1.97"H

**MODULES CONT'D**


**11W WALL WASH**

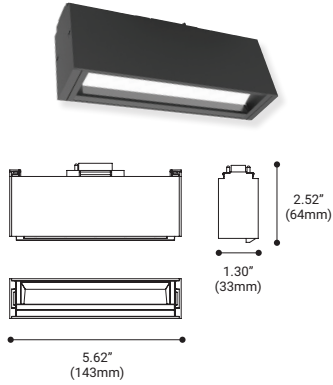

**MODULE SPECIFICATIONS**

NUMBER	36376-01
WATTS	11W INTEGRATED LED
BEAM ANGLE	70° (WALL WASH)
KELVIN	3000K
DELIVERED LUMENS	510LM
CRI	90+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	1.30" Dia x 5.62"W x 2.52"H


**6.4W SPOT**

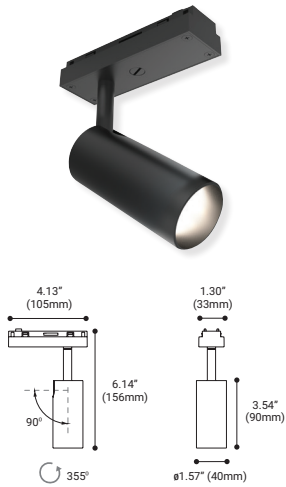

NUMBER	35763-01
WATTS	6.4W INTEGRATED LED
BEAM ANGLE	20°
KELVIN	3000K
DELIVERED LUMENS	330LM
CRI	90+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	1.30" Dia x 4.13"W x 3.54"H

## MODULES CONT'D


### 13.5W SPOT

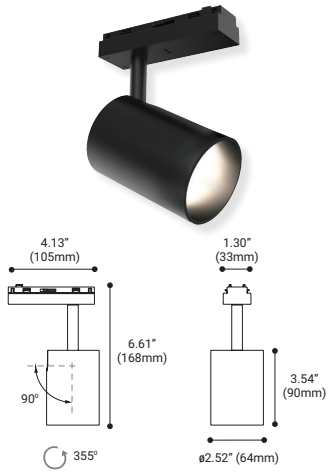


## MODULE SPECIFICATIONS

NUMBER	35764-01
WATTS	13.5W INTEGRATED LED
BEAM ANGLE	20°
KELVIN	3000K
DELIVERED LUMENS	770LM
CRI	90+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	2.52" Dia x 4.13"W x 3.54"H

### 6.4W SUSPENDED

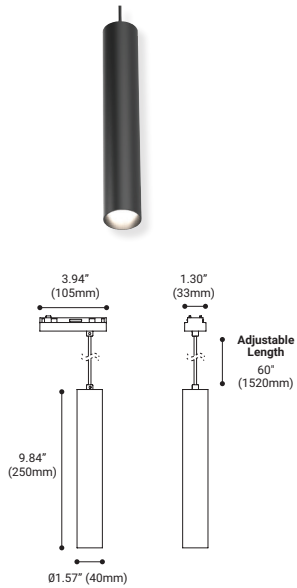

NUMBER	35766-01
WATTS	6.4W INTEGRATED LED
BEAM ANGLE	20°
KELVIN	3000K
DELIVERED LUMENS	330LM
CRI	90+
DIMMING	TRIAC STANDARD, 0-10V IS CONSULT FACTORY
VOLTAGE	24V DC
COLOR	Black/White
DIMENSIONS	1.57" Dia x 3.94"W x 9.84"H




3000K




1-10V

TRIAC


PHOTOMETRICS

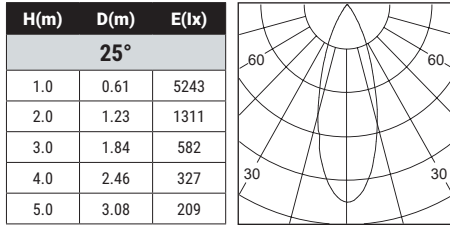


**33W MULTIPLE LIGHT**  
35759-01

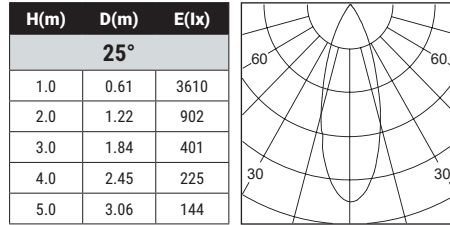


**22W MULTIPLE LIGHT**  
35758-01

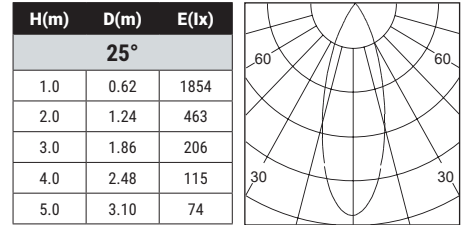


**11W MULTIPLE LIGHT**  
35757-01

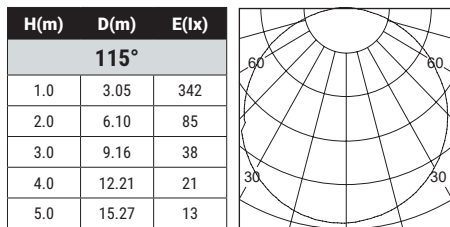


**27.5W LENS**  
36374-01

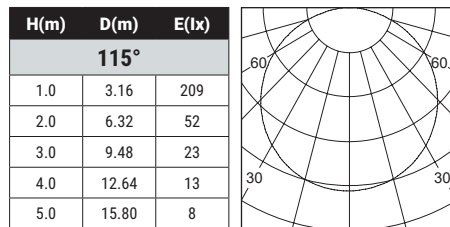


**19W LENS**  
36373-01

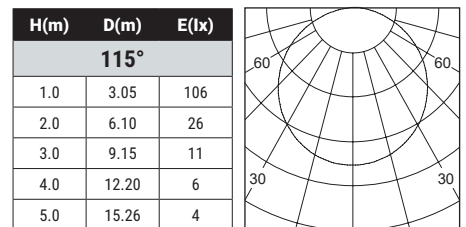


**10W LENS**  
36372-01

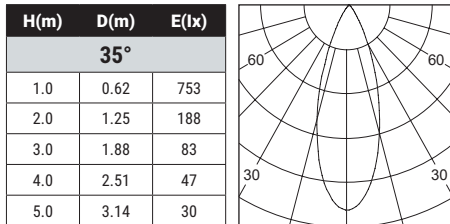


**4.5W DUAL LENS**  
35765-01

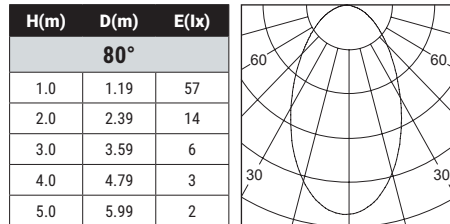


**4.5W DUAL BAFFLE**  
36377-01

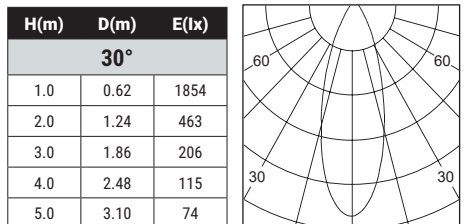


**11W MULTIPLE SPOT**  
36379-01

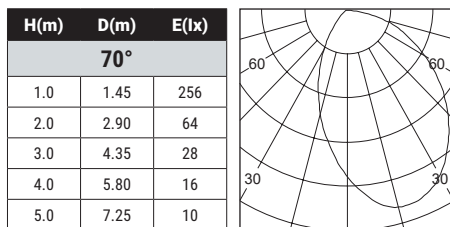


**11W WALL WASH**  
36376-01

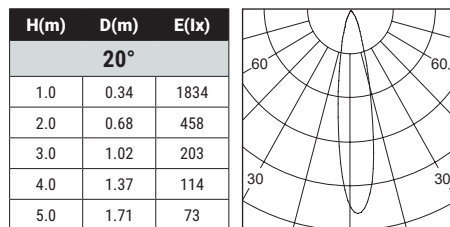

**6.4W SPOT**  
35763-01

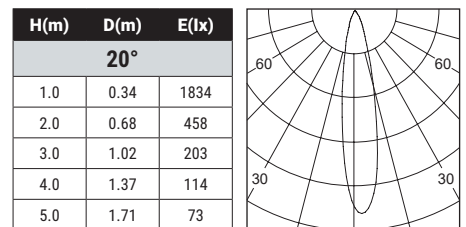

**13.5W SPOT**  
35764-01

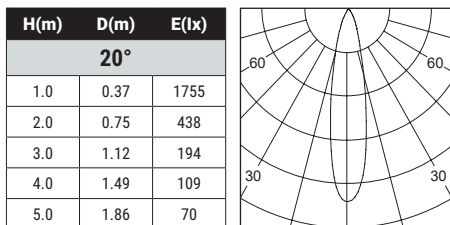

**6.4W SUSPENDED LIGHT**  
35764-01