





45374 SLIM ROUND DOWNLIGHT



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

TYPE:		
DATE:		
NOTES:		



2700K . 3000K . 3500K . 4000K . 5000K

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location.

DIMENSIONS

- Cut hole: ø4 1/4".
- Fixture: ø5" x 13/16"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F)(-20°C~-40°C).

LIGHT MODULE

- 1 x12W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 110 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 5
- Delivered Lumen: 687 lm |752 lm |775 lm |779 lm |728 lm

CERTIFICATIONS















ORDERING GUIDE

MODEL	FINISH
45374-012	White


BEAM WATTS LUMENS KELVIN DIMMABLE CRI **ADJUSTABLE** ANGLE TRIAC/ELV NO ø4 1/4' 12 W Up to 799 **CCT Selectable** 90+ 110°







PRODUCT DIMENSIONS

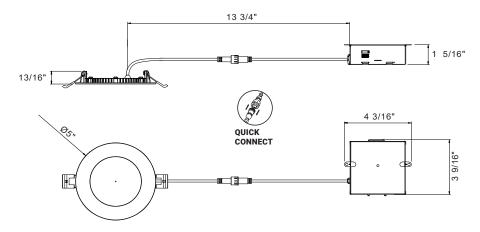

ACCESSORIES



45612-012 60" 3 pin Connector



45376-016 NEW CONSTRUCTION SMASH PLATE13 1/4" x 6 1/2"

Ø4 1/4"



NO IC BOX REQUIRED