




3.5"

45382 TRIPLE REGRESSED GIMBAL

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

ø10 7/8

3 3/4"





2700K . 3000K . 3500K . 4000K . 5000K

CRI

90+

DIMMABLE

TRIAC/ELV

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

DIMENSIONS

- Cut hole: ø10 7/8"x 3 3/4".
- Fixture: ø11 5/8" x 3 3/16"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F)(-20°C~-40°C).

LIGHT MODULE

- 1 x 36W Integrated LED COB.
- · Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- · Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 1914 lm |2025 lm |2202 lm |2300 lm |2280 lm

CERTIFICATIONS













ORDERING GUIDE

MODEL	FINISH
45382-024	Black
45382-017	White

Driver Box included

WATTS

36W

LUMENS

Up to 2300



KELVIN

CCT Selectable

FINISHES





ADJUSTABLE

30°

024- Black 017


BEAM

ANGLE

38°

017- White

PRODUCT DIMENSIONS

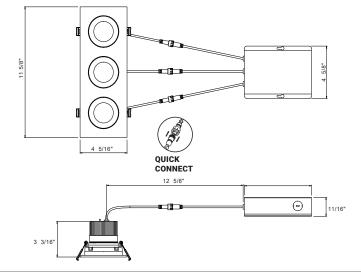

ACCESSORIES

45611-018 60" 2 pin Connector



45383-014 2LT/3LT OPENIOR OF THE OF THE

16 1/4" x 11 7/8"



NO IC BOX REQUIRED

