

PROJECT

DATE:

TYPE:

NOTES:

CHARLIE TRACK HEAD

Charlie stays true to the conventional style of track lighting systems and incorporates simplistic, modern style. Made out of diecast aluminum, it is built to last with durable strength like no other.

Available in both a matte black and white finish, the Charlie collection will easily match a variety of décor for consistent style.

SPECIFICATIONS

FEATURES

MODEL NUMBER	35455
LIGHT SOURCE	30W Integrated LED
BEAM ANGLE	30°
VERTICAL ROTATION	90°
HORIZONTAL ROTATION	350°
KELVIN	3000K/3500K
DELIVERED LUMENS	2670lm
CRI	90+
DIMMING	TRIAC
COLOR	Black/White
INPUT	120


CERTIFICATIONS



ORDERING GUIDE

CHARLIE	KELVIN	COLOR	PRODUCT CODES
35455	3000K	BLACK (01)	35455-30-01
	3000K	WHITE (02)	35455-30-02
	3500K	BLACK (01)	35455-35-01
		WHITE (02)	35455-35-02

SHOWN: Single 30W LED Track Head (Black & White)






CHARLIE Track Head




COLOR TEMPERATURE




DIMMING



FINISHES



PHOTOMETRIC SUMMARY



CERTIFICATION / RATING

WARRANTY	5 Years
ETL/UL	ETL
TITLE 24	Title 24 Compliant
LM79/80 COMPLIANCE	LM80 Compliant
IP RATING	IP20

LIGHT TECHNOLOGY

LIGHT SOURCE	COB LED
LED BRAND	Citizen
L90 (LUMEN MAINTENANCE)	L90/55,000 Hours
WATTAGE	30W
NOMINAL LUMEN	2670lm
EFFICIENCY (LM/W)	CITIZEN: 129LM/W (*based on 3000K)
COLOR TEMPERATURE	3000K, 3500K
CRI	90+
DELIVERED OUTPUT & INTENSITY	2670lm
COLOR CONSISTENCY	2-step & 3-step MacAdam Ellipse
DIMMING OPTIONS/CONTROLS	TRIAC dimming
VOLTAGE	120V


FIXTURE SPECIFICATIONS

LOCATION	Dry	
BEAM ANGLE	- 30° (Medium)	
BODY FINISHES	Matte black, matte white	



MODULAR TRACK

- Versatile and adaptable, modular lighting allows you to configure a lighting scheme that is custom configured to your needs
- Feature all adjustability for aiming in any direction
- Field-cuttable track sections are combined with feeds and joiners making virtually any configuration possible

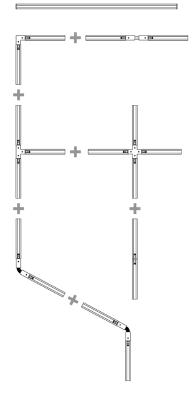



Fase¹ 33 West Beaver Creek Road, Richmond Hill, Ontario, Canada

TRACK

- Single circuit track, 3-conductor, 20A maximum per circuit
- Can be surface mounted on walls or ceilings
- Field cuttable to desired length
- Use components to build any desired configuration
- Includes 2 dead-end covers

1002 2-FOOT TRACK

1004 4-FOOT TRACK

1008 8-FOOT TRACK





· Can be fed from the back or top



CHARLIE

Track Head

MINI CONNECTOR

- Joins two tracks mechanically and electrically
- Power cannot be fed



FLEXIBLE CONNECTOR

For joining two tracks in a variable angle 0 to 90 degrees and feeding power



L CONNECTOR

- For joining two tracks at a 90 degree angle
- and feeding power Allows independent feed or same circuit
- Polarized and pre-wired





T CONNECTOR

- For joining three tracks in "T" configuration and feeding power
- Allows independent feed or same circuit. • Polarized and pre-wired



X CONNECTOR

- · For joining three tracks in an "X" configuration and feeding power
- Allows independent feed or same circuit
- · Polarized and pre-wired

ITEM#	FINISHES	
1550	-01 0 -02 •	

