

ROUTE SYSTEM



FEATURES

A plug and play module designed for easy installation and maintenance, the Route collection features a revolutionary connecting system combined with interior building material. The Route offers its specially designed mechanism, allowing fixtures to connect with 0-10V systems.

Whether it be lighting a grand entrance to your home or lighting the floor of your retail space, the Route has the flexibility to adapt to your lighting needs and is the perfect choice when large lighting layouts need an architectural look.

NUMBER	36455-01
WATTS	40W Integrated LED
BEAM ANGLE	115°
KELVIN	3000K
DELIVERED LUMENS	1800LM
CRI	90+
DIMMING	TRIAC Standard, 0-10V is consult factory
INPUT VOLTAGE	120V AV
COLOR	Black
DIMENSION	35.43"L x 3.74"W


SHOWN: 40W LENS - Surface mounted

CERTIFICATIONS



MOUNT CHOICES

SURFACE MOUNT / PENDANT / MOUNTED BETWEEN WALLS

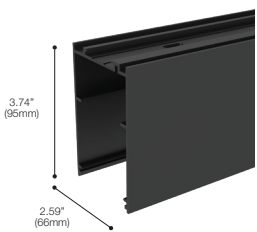

AVAILABLE LENGTHS

36433*	6ft. (1828mm)
36434*	8ft. (2438mm)
36435*	10ft. (3048mm)

COLOR


Finishes: Black

*Field Cuttable. Please consult factory.



Surface Mount




Pendant Mount



Between Walls



TRIMLESS RECESSED

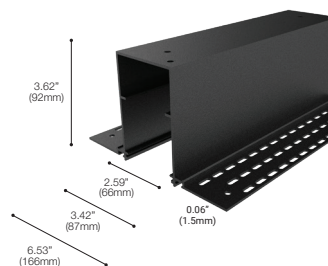

AVAILABLE LENGTHS

36436*	6ft. (1828mm)
36437*	8ft. (2438mm)
36438*	10ft. (3048mm)


COLOR

Finishes: Black


*Field Cuttable. Please consult factory.

MODULES


16.5W SPOT

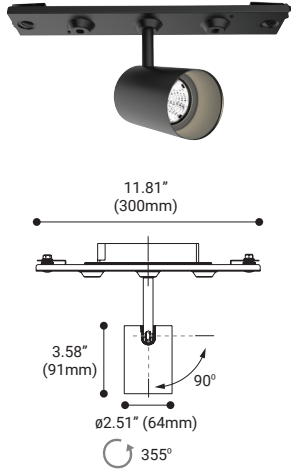

30W SPOT

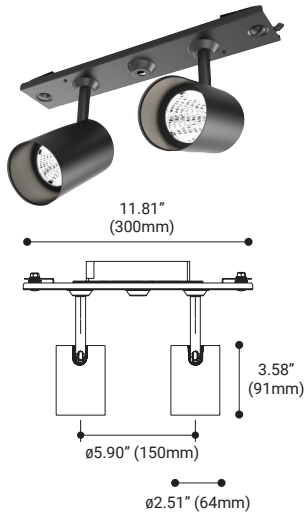

30W DOWNLIGHT

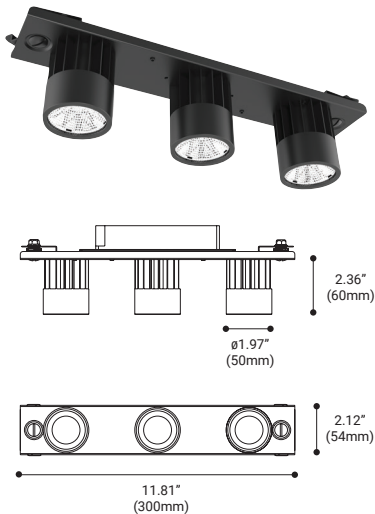

MODULE SPECIFICATIONS


NUMBER	36458-01
WATTS	16.5W Integrated LED
BEAM ANGLE	30°
KELVIN	3000K
DELIVERED LUMENS	700LM
CRI	90+
DIMMING	TRIAC Standard, 0-10V is consult factory Standard, 0-10V is consult factory
INPUT VOLTAGE	120V AV
COLOR	Black
DIMENSION	2.51" Dia x 11.81"W 3.58"H

NUMBER	36460-01
WATTS	30W Integrated LED
BEAM ANGLE	30°
KELVIN	3000K
DELIVERED LUMENS	1400LM
CRI	90+
DIMMING	TRIAC Standard, 0-10V is consult factory
INPUT VOLTAGE	120V AV
COLOR	Black
DIMENSION	2.51" Dia x 11.81"W 3.58"H

NUMBER	36456-01
WATTS	30W Integrated LED
BEAM ANGLE	38°
KELVIN	3000K
DELIVERED LUMENS	2500LM
CRI	90+
DIMMING	TRIAC Standard, 0-10V is consult factory
INPUT VOLTAGE	120V AV
COLOR	Black
DIMENSION	2.51" Dia x 11.81"W 3.58"H

MODULES CONT'D


36W MULTIPLES

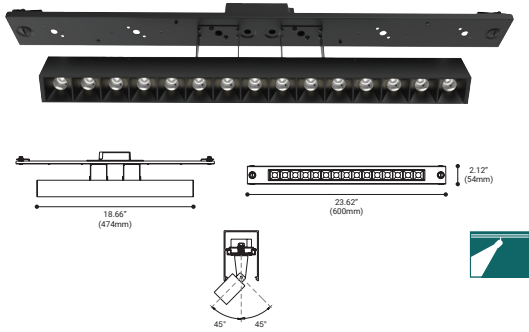

MODULE SPECIFICATIONS


NUMBER	36465-01
WATTS	36W Integrated LED
BEAM ANGLE	30°
KELVIN	3000K
DELIVERED LUMENS	2550LM
CRI	90+
DIMMING	TRIAC Standard, 0-10V is consult factory
INPUT VOLTAGE	120V AV
COLOR	Black
DIMENSION	18.66" Dia x 23.62"W 2.12"H

24W MULTIPLES

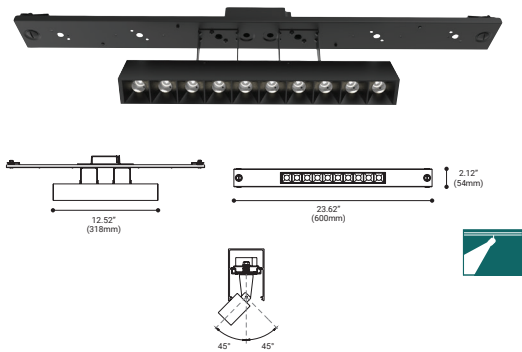

NUMBER	36463-01
WATTS	24W Integrated LED
BEAM ANGLE	30°
KELVIN	3000K
DELIVERED LUMENS	1700LM
CRI	90+
DIMMING	TRIAC Standard, 0-10V is consult factory
INPUT VOLTAGE	120V AV
COLOR	Black
DIMENSION	12.52" Dia x 23.62"W 2.12"H


12W MULTIPLES

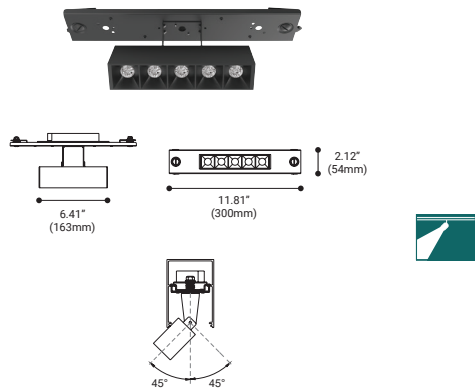

NUMBER	36462-01
WATTS	12W Integrated LED
BEAM ANGLE	30°
KELVIN	3000K
DELIVERED LUMENS	850LM
CRI	90+
DIMMING	TRIAC Standard, 0-10V is consult factory
INPUT VOLTAGE	120V AV
COLOR	Black
DIMENSION	6.41" Dia x 11.81"W 2.12"H

MODULES CONT'D


40W LENS

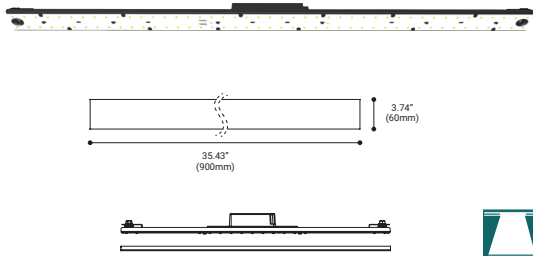

MODULE SPECIFICATIONS


NUMBER	36455-01
WATTS	40W Integrated LED
BEAM ANGLE	115°
KELVIN	3000K
DELIVERED LUMENS	1800LM
CRI	90+
DIMMING	TRIAC Standard, 0-10V is consult factory
INPUT VOLTAGE	120V AV
COLOR	Black
DIMENSION	35.43"L x 3.74"W

35W LENS

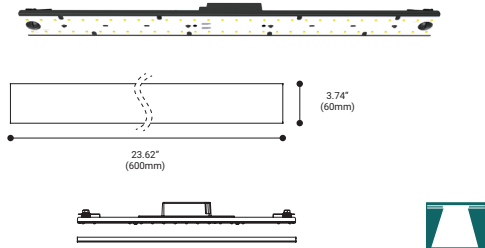


NUMBER	36453-01
WATTS	35W Integrated LED
BEAM ANGLE	115°
KELVIN	3000K
DELIVERED LUMENS	1400LM
CRI	90+
DIMMING	TRIAC Standard, 0-10V is consult factory
INPUT VOLTAGE	120V AV
COLOR	Black
DIMENSION	23.62"L x 3.74"W

20W LENS

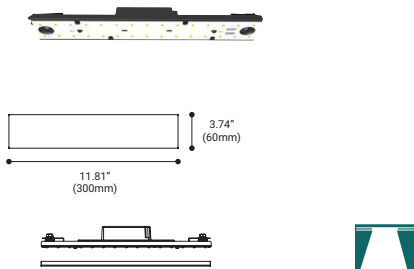

NUMBER	36452-01
WATTS	20W Integrated LED
BEAM ANGLE	115°
KELVIN	3000K
DELIVERED LUMENS	770LM
CRI	90+
DIMMING	TRIAC Standard, 0-10V is consult factory
INPUT VOLTAGE	120V AV
COLOR	Black
DIMENSION	11.81"L x 3.74"W

MODULAR LIGHT TECHNOLOGY



3000K




ROUTE

LED Modular System


Fase¹

33 West Beaver Creek Road,
Richmond Hill, Ontario, Canada


PHOTOMETRICS (METRICS)

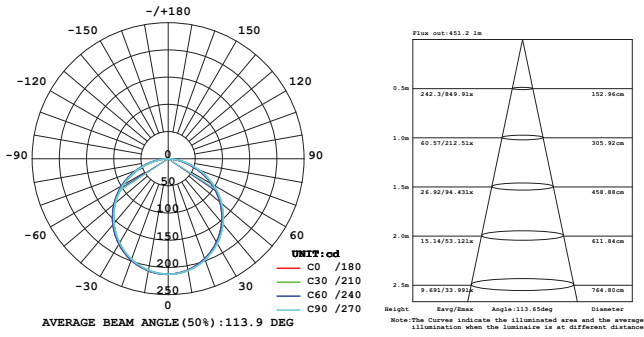


36451-01

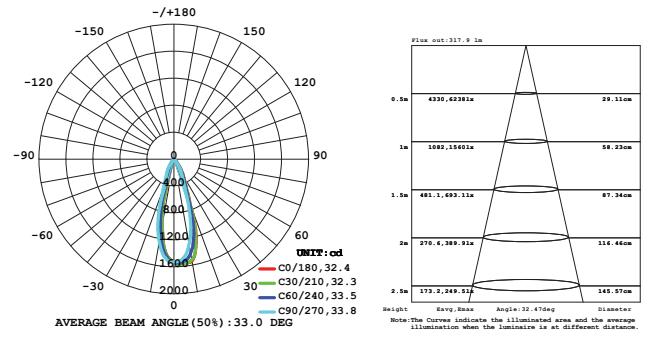


36458-01

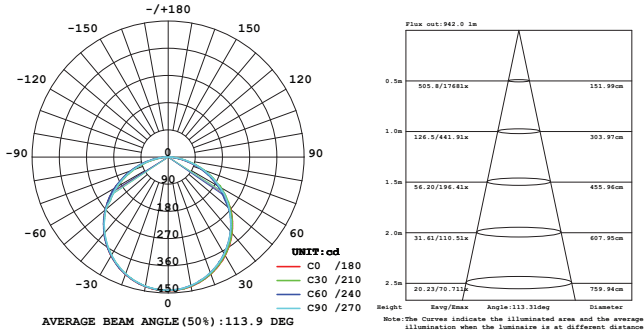


36453-01

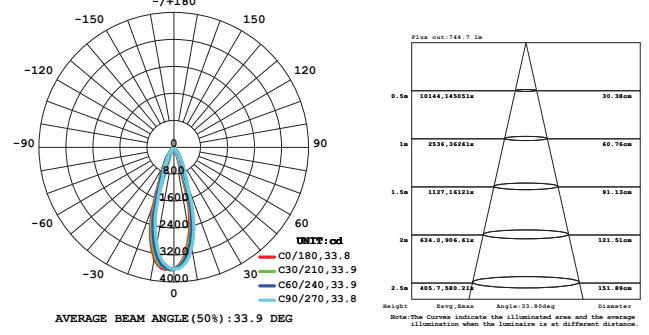


36460-01

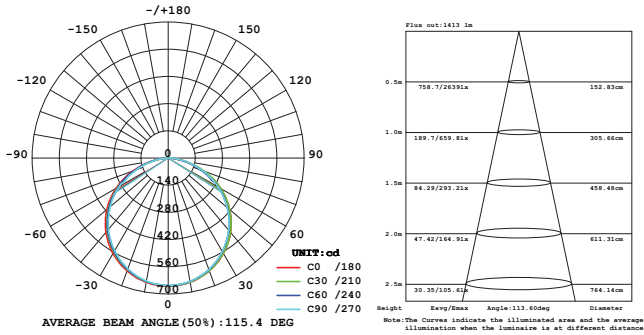


36465-01

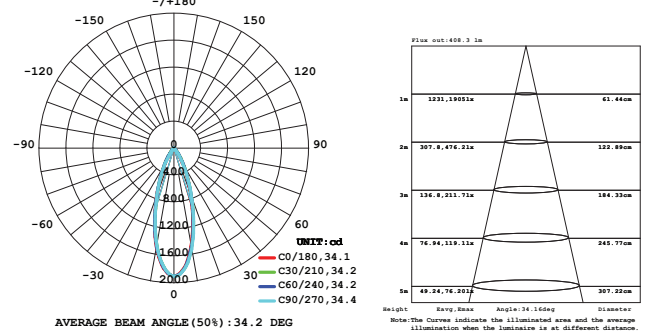


36462-01

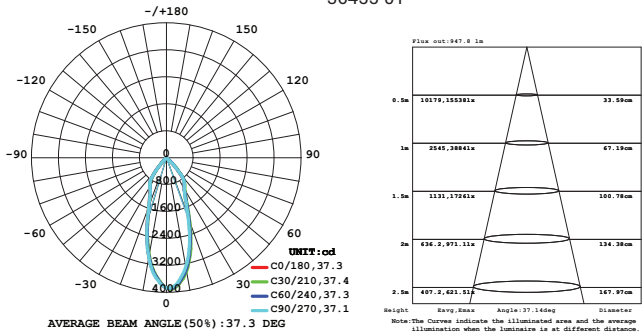

36455-01


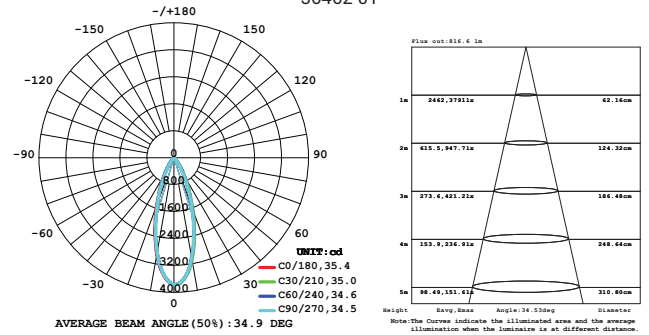


36463-01


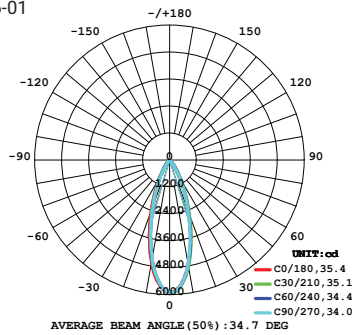


36465-01



PHOTOMETRICS (IMPERIAL)

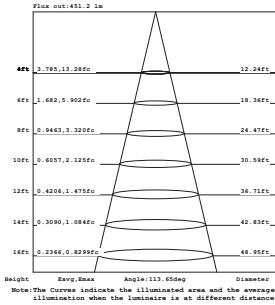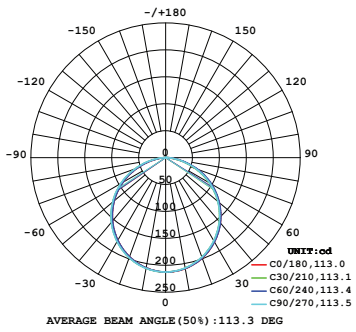



36451-01

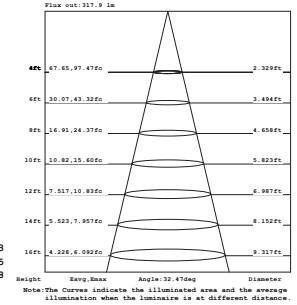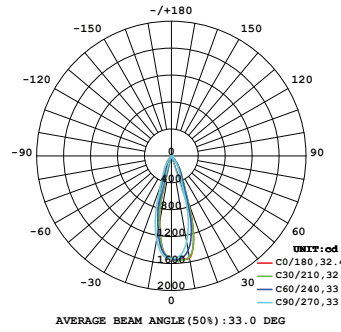



36458-01

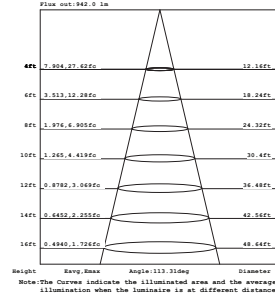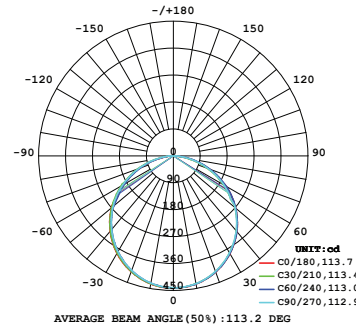



36453-01





36458-01

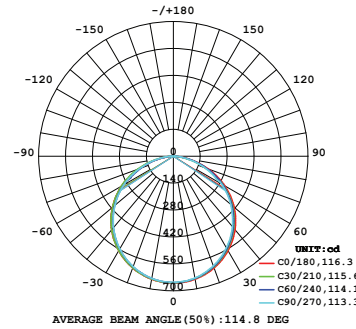



36455-01





36460-01

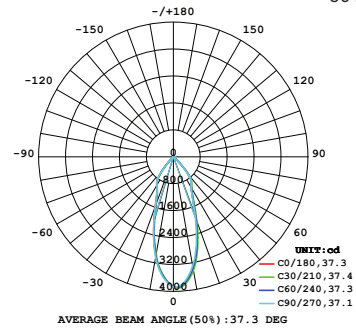

36455-01



36462-01



36465-01